

Сетевой фотоэлектрический инвертор LG50CX-P2-CN

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +375-257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: agy@nt-rt.ru || сайт: <https://laeg.nt-rt.ru>

LG50CX-P2-CN

String Inverter

NEW



Efficient power generation

- Self-adaptive to weak grid, good grid connection and high yield
- 15A DC input, can be adapted to 500W+ large modules.
- Wide operating voltage range, early startup, late shutdown, more durable power generation.



safe and worry-free


- EMC comparable to household appliances, away from radiation hazards
- Aluminum alloy shell, electrostatic spraying process, no rust for 25 years
- Strong 4G communication signal, wide coverage




Easy Operation and Maintenance

- Handle design on both sides, weight 20% better than industry average
- Contact-free, near-end Bluetooth real-time data viewing
- Intelligent string detection, second-level data display, accurate troubleshooting

Efficiency Curve

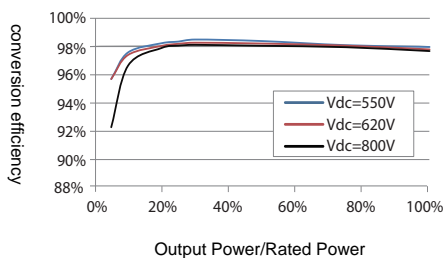

circuit block diagram

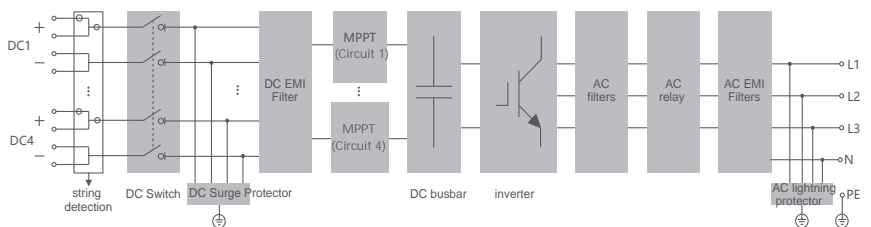

Product Model	LG50CX-P2-CN
Input (DC)	
Maximum Input Voltage	1100V
Minimum input voltage/starting voltage	160V / 200V
Rated Input Voltage	600V
MPPT voltage range	160~1000V
Maximum number of MPPT input strings per channel	2
Maximum input current per circuit	15A
Maximum Input Current	120A(4x30A)
Number of MPPTs	4
Maximum allowable input terminal current	30A
Maximum DC short-circuit current	160A(4X40A)
Output (AC)	
Rated output power	50000W
Maximum output power	55000W
Maximum output apparent power	55000VA
Maximum Output Current	83.6A
Rated grid voltage	3 / N / PE, 230 / 400V, 220 / 380V
Grid voltage range	312~480V
Rated grid frequency/grid frequency range	50Hz / 45~55Hz
Total current waveform distortion rate	<3 % (at rated power)
DC component	< 0.5% I _n
Power factor	>0.99 (at rated power)
Power factor adjustable range	0.8 ahead ~ 0.8 behind
Number of feeder phases / number of output phases	3 / 3
Efficiency	
Maximum efficiency	98.52%
China Efficiency	98.00%
Safeguard	
DC reverse connection protection	able fulfill
AC short circuit protection	able fulfill
Leakage current protection	able fulfill
Grid monitoring	able fulfill
DC Switch	able fulfill
String detection	able fulfill
Crypto-protection	able fulfill
Surge protection	DC secondary/AC secondary
Common parameter	
Dimension (W*H*D)	605*575*245mm
Weights	38 kg
Isolation method	transformerless
Protection class	IP66
Nighttime loss	≤1 W
Operating Temperature Range	-30 to 60 °C
Operating humidity range (without condensation)	0~100%
Cooling method	Intelligent forced air cooling
Maximum working altitude	4000m (>2000m derating)
Demonstrate	LED,Bluetooth+APP
Newsletter	RS485 * 2, 4G
DC Terminal Type	MC4
AC Terminal Type	OT/DT terminal (max. 50mm ²)
Standards-compliant	NB / T 32004-2018, GB / T 37408-2019
Grid support	Anti-Islanding, Active Reactive Regulation, PF Control, Slow Start/Shutdown

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +375-257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: agy@nt-rt.ru || сайт: <https://laeg.nt-rt.ru>