

# Сетевой фотоэлектрический инвертор LG110CX-P2-CN

## Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +375-257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: [agy@nt-rt.ru](mailto:agy@nt-rt.ru) || сайт: <https://laeg.nt-rt.ru>

# LG110CX-P2-CN

## Series inverter

NEW



### Efficient power generation:

- 9 way MPPT design, complex application scenarios to increase power generation
- Single series current 15A, easy access to 500W+ components
- Intelligent series power optimization technology to improve the generation of shadow scenes



### Save investment:

- Ac independent drawer box, save more than 30% of the operation time
- Support series two-sink one access, saving DC cable costs
- Supports a maximum of 240mm<sup>2</sup> aluminum cable access, saving AC cable costs



### Safe and reliable :


- Active diagnosis of key components ensures stable operation of the system
- IP66 protection, C5 anticorrosion grade, adapt to various harsh environments
- Ac-dc lightning protection is standard




### Intelligent operation and maintenance:

- 10s refresh data, faster and finer O&M
- High-precision string detection and I-V diagnosis, accurate location of abnormal strings
- Ac and DC dual power supply, 7\*24H online monitoring and upgrade maintenance

Efficiency curve

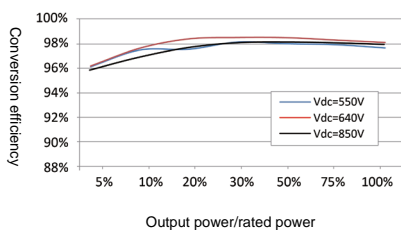

Circuit block diagram

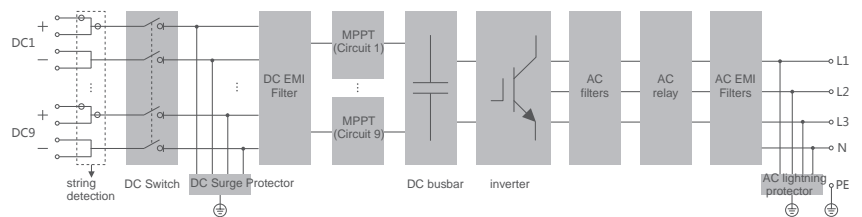

Product model	LG110CX-P2-CN
<b>Input (DC)</b>	
Maximum input voltage	1100V
Minimum input voltage/starting voltage	180V / 200V
Rated input voltage	640V
MPPT voltage range	180~1000V
MPPT quantity	9
Maximum number of MPPT input strings per channel	2
Maximum input current of each channel	15A
Maximum input current	270A ( 9x30A )
Maximum allowable current of input terminal	30A
Maximum DC short-circuit current	360A ( 9x40A )
<b>Output (AC)</b>	
Rated output power	110kW
Maximum output power	121kW
Maximum output apparent power	121kVA
Maximum output current	183.3A
Rated network voltage	3 / N / PE, 230/400V
Grid voltage range	320~480V
Rated gridfrequency /grid frequency range	50Hz / 45~55Hz 60Hz / 55~65Hz
Total current waveform distortion rate	< 3% (at rated power)
Power factor	>0.99 (at rated power)
Power factor adjustable range	0.8 ahead ~ 0.8 behind
Number of feed phases/number of output phases	3 / 3
<b>Efficiency</b>	
Maximum efficiency	98.60%
Chinese efficiency	98.00%
<b>Protection</b>	
Dc reverse protection	able fulfill
Ac short circuit protection	able fulfill
Leakage current protection	able fulfill
Power grid monitoring	able fulfill
Dc switch	able fulfill
String detection	able fulfill
Island protection	able fulfill
Surge protection	DC secondary / AC secondary
<b>Universal parameter</b>	
Dimensions (width × height × depth)	1019*793*360mm
Weight	82kg
Isolation mode	transformerless
Class of protection	IP66
Night loss	≤4W
Operating temperature range	-30~+60℃
Operating humidity range	0~100%
Cooling mode	Intelligent air-cooled
Maximum working altitude	4000m (>3000m derated)
Reveal	LED, Bluetooth + APP
Communication	RS485 / 4G (optional)
Dc terminal type	MC4
Ac terminal type	OT/DT terminal (max. 70~240mm <sup>2</sup> )
Meet the standard	NB/T 32004-2018 ; GB/T 37408-2019
Grid support	ZVRT, Anti-Islanding, Active Reactive Regulation, PF Control, Slow Start/Shutdown

## По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +375-257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: [agy@nt-rt.ru](mailto:agy@nt-rt.ru) || сайт: <https://laeg.nt-rt.ru>